

Non-Metallic Liquidtight Connectors



Features/Industry Standards

- For use with type B, non-metallic conduit
- Constructed from UV rated plastic for long life, standard grey color ★
- No spin ferrule allows easy one piece assembly to conduit
- Internal gland provides positive seal when nut is tightened
- Polypropylene sealing ring assures tight seal between fitting and box
- Available in one-piece or traditional multi-piece configurations
- Straight connectors UL listed for concrete encasement
- UL Standard 514B, UL Listed File # E-164106
- CSA Certified File # LR-84574
- C-UL Listed for Canada

Specification/Ordering Information

Straight Connectors

PRODUCT CODE	CATALOG NUMBER	WEIGHT PER/C	TRADE SIZE	CARTON INNER	CARTON MASTER
0901-22-00	NMLT-38	6	3/8"	25	100
0902-22-00	NMLT-50	6	1/2"	25	100
0903-10-00	NMLT-75	9	3/4"	10	50
0904-05-00	NMLT-100	14	1"	5	25
0905-05-00	NMLT-125	27	1-1/4"	5	25
0906-02-00	NMLT-150	32	1-1/2"	2	10
0907-02-00	NMLT-200	44	2"	2	10
90° Connectors					
0991-10-00	NMLT-9038	8	3/8"	10	50
0992-10-00	NMLT-9050	8	1/2"	10	50
0993-10-00	NMLT-9075	12	3/4"	10	50
0994-05-00	NMLT-90100	21	1"	5	25
0995-05-00	NMLT-90125	40	1-1/4"	5	25
0996-02-00	NMLT-90150	51	1-1/2"	2	10
0997-02-00	NMLT-90200	77	2"	2	10

New One-Piece Configuration Straight Connectors

830-016P	830-016P	6	1/2"	25	100
830-021P	830-021P	9	3/4"	10	50

New One-Piece Configuration 90° Connectors



840-016P	840-016P	6	1/2"	10	50
840-021P	840-021P	9	3/4"	10	50

Straight & 90° Connector Specifications



TRADE SIZE	KNOCK OUT SIZE	NOMINAL DIMENSIONS (INCHES)					
		A	B	C	D	E	F
3/8"	1/2"	1.54	.627	1.39	2.24	2.50	.540
1/2"	1/2"	1.54	.627	1.39	2.24	2.50	.540
3/4"	3/4"	1.60	.640	1.58	2.50	2.91	.550
1"	1"	1.97	.778	1.92	3.17	3.54	.670
1-1/4"	1-1/4"	1.87	.720	2.41	3.36	3.96	.660
1-1/2"	1-1/2"	2.01	.653	2.68	3.45	4.13	.660
2"	2"	2.05	.690	3.31	4.04	4.68	.675

★ Black available upon request

STRAIGHT

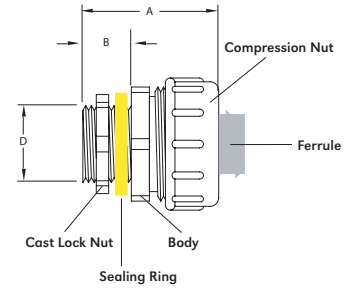

90°

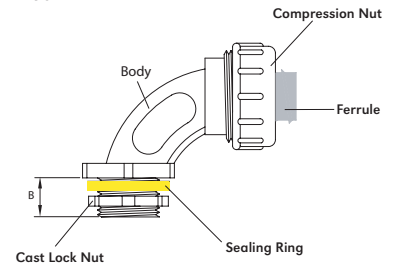

See nominal dimensions in table below

